




# MBM SERIES

## SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIERS

Voltage Range - 200 to 1000 Volts Current - 0.5/0.8 Ampere

### MBM

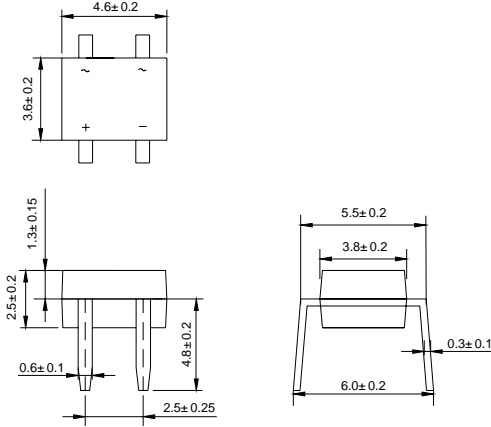

Dimensions in inches and (millimeters)

### FEATURES

- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction utilizing molded plastic technique
- ◆ High temperature soldering guaranteed: 260\*/10 seconds at 5 lbs., (2.3kg) tension
- ◆ Small size, simple installation
- ◆ Leads solderable per MIL-STD-202, Method 208
- ◆ High surge current capability

### MECHANICAL DATA

**Case:** Molded plastic body

**Terminals:** Plated leads solderable per MIL-STD-750, Method 2026

**Polarity:** Polarity symbols marked on case

**Mounting Position:** Any

**Weight:** 0.04 ounce, 1.0 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25\* ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load derate current by 20%.

	SYMBOLS	MB2M	MB4M	MB6M	MB8M	MB10M	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	200	400	600	800	1000	VOLTS
Maximum RMS voltage	$V_{RMS}$	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	$V_{DC}$	200	400	600	800	1000	VOLTS
Maximum average forward rectified current at $T_A=30^*$ On glass-epoxy P.C.B. On aluminum substrate	$I_{F(AV)}$			0.5 0.8			Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$			35			Amps
Maximum instantaneous forward voltage drop per leg at 0.4A	$V_F$			1.0			Volts
Maximum DC reverse current $T_A=25^*$ at rated DC blocking voltage $T_A=100^*$	$I_R$			5.0 100			$\mu A$ $\mu A$
Typical junction capacitance per leg (Note3)	$C_J$			15			pF
Typical thermal resistance per leg	$R^*_{JA}$			75			*/W
Operating temperature range	$T_J$			-55 to +150			*
storage temperature range	$T_{STG}$			-55 to +150			*

NOTES: 1. On glass epoxy P.C.B. mounted on 0.05x0.05"(1.3x1.3mm) pads

2. On aluminum substrate P.C.B. with on area of 0.8"x0.8"(20x20mm) mounted on 0.05x0.05"(1.3x1.3mm) solder pad

3. Measured at 1.0MHz and applied reverse voltage of 4.0 volts.

# RATINGS AND CHARACTERISTIC CURVES MBM SERIES

